



■ NEOPRENE

■ 1/4, 5/16 & 3/8 INCH - 6, 8 & 9.5 mm WIDE

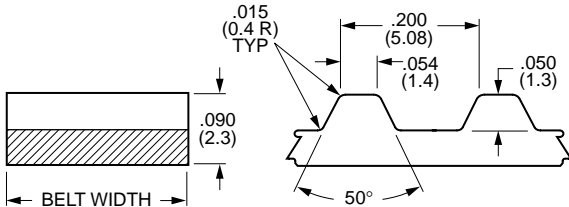

NOTE: Dimensions in () are mm size.

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example	
I N C H	A 6 R 3- <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	025 031 037	1/4 5/16 3/8	A 6 R 3-034037 is a 34 Groove 3/8" Wide Belt.	
	No. of Grooves (See tables below)				Width Code (See right)
M E T R I C	A 6 R 3 M <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	060 080 095	6 mm 8 mm 9.5 mm	A 6 R 3M060080 is a 60 Groove 8 mm Wide Belt.	
	No. of Grooves (See tables below)				Width Code (See right)

BREAKING STRENGTH: 113 lbs. per 1/8" (158 N per 1 mm) Belt Width; not representative of the load-carrying capacity of the belt.

WORKING TENSION: 28 lbs. for 1" belt (125 N for 25.4 mm belt). For more on Working Tension, see the technical section.

MATERIAL: Nylon Covered, Fiberglass Reinforced, Neoprene

TEMPERATURE RANGE: -30°F to +185°F (-34°C to +85°C)

No. of Grooves	Pitch Length	
	Inch	mm
21	4.2	106.68
25	5.0	127
27	5.4	137.16
28	5.6	142.24
29	5.8	147.32
30	6.0	152.4
31	6.2	157.48
32	6.4	162.56
33	6.6	167.64
34	6.8	172.72
35	7.0	177.8
36	7.2	182.88
37	7.4	187.96
38	7.6	193.04
39	7.8	198.12
40	8.0	203.2
41	8.2	208.28
42	8.4	213.36
43	8.6	218.44
44	8.8	223.52
45	9.0	228.6
46	9.2	233.68

No. of Grooves	Pitch Length	
	Inch	mm
47	9.4	238.76
48	9.6	243.84
49	9.8	248.92
50	10.0	254
51	10.2	259.08
52	10.4	264.16
53	10.6	269.24
54	10.8	274.32
55	11.0	279.4
56	11.2	284.48
57	11.4	289.56
58	11.6	294.64
59	11.8	299.72
60	12.0	304.8
61	12.2	309.88
62	12.4	314.96
63	12.6	320.04
64	12.8	325.12
65	13.0	330.2
66	13.2	335.28
67	13.4	340.36
68	13.6	345.44

No. of Grooves	Pitch Length	
	Inch	mm
69	13.8	350.52
70	14.0	355.6
71	14.2	360.68
72	14.4	365.76
73	14.6	370.84
74	14.8	375.92
75	15.0	381
76	15.2	386.08
77	15.4	391.16
78	15.6	396.24
79	15.8	401.32
80	16.0	406.4
81	16.2	411.48
82	16.4	416.56
83	16.6	421.64
84	16.8	426.72
85	17.0	431.8
86	17.2	436.88
87	17.4	441.96
88	17.6	447.04
89	17.8	452.12
90	18.0	457.2



Continued on the next page

Special Widths - cut to size from sleeves available from stock.

Pulleys are available with inch or metric standards.

■ NEOPRENE

■ 1/4, 5/16 & 3/8 INCH - 6, 8 & 9.5 mm WIDE

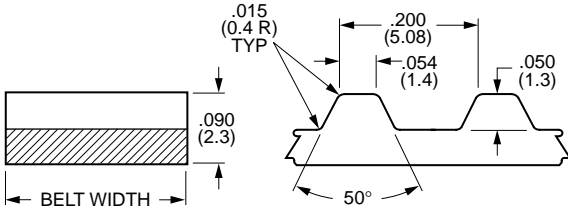

NOTE: Dimensions in () are mm size.

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example
I N C H	A 6 R 3- <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	025	1/4	A 6 R 3-092025 is a 92 Groove 1/4" Wide Belt.
	No. of Grooves (See tables below) Width Code (See right)	031	5/16	
		037	3/8	
M E T R I C	A 6 R 3 M <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	060	6 mm	A 6 R 3M098060 is a 98 Groove 6 mm Wide Belt.
	No. of Grooves (See tables below) Width Code (See right)	080	8 mm	
		095	9.5 mm	

BREAKING STRENGTH: 113 lbs. per 1/8" (158 N per 1 mm) Belt Width; not representative of the load-carrying capacity of the belt.

WORKING TENSION: 28 lbs. for 1" belt (125 N for 25.4 mm belt). For more on Working Tension, see the technical section.

MATERIAL: Nylon Covered, Fiberglass Reinforced, Neoprene

TEMPERATURE RANGE: -30°F to +185°F (-34°C to +85°C)

No. of Grooves	Pitch Length	
	Inch	mm
91	18.2	462.28
92	18.4	467.36
93	18.6	472.44
94	18.8	477.52
95	19.0	482.6
96	19.2	487.68
97	19.4	492.76
98	19.6	497.84
99	19.8	502.92
100	20.0	508
101	20.2	513.08
102	20.4	518.16
103	20.6	523.24
104	20.8	528.32
105	21.0	533.4
106	21.2	538.48
107	21.4	543.56
109	21.8	553.72
110	22.0	558.8
111	22.2	563.88
113	22.6	574.04
114	22.8	579.16

No. of Grooves	Pitch Length	
	Inch	mm
115	23.0	579.12
116	23.2	584.2
117	23.4	589.28
118	23.6	594.36
120	24.0	599.44
121	24.2	609.6
122	24.4	614.68
123	24.6	619.76
124	24.8	624.84
125	25.0	629.92
127	25.4	640.08
128	25.6	645.16
129	25.8	650.24
130	26.0	655.32
131	26.2	660.4
132	26.4	665.48
133	26.6	670.56
134	26.8	675.64
135	27.0	680.72
136	27.2	685.8
137	27.4	690.88
138	27.6	701.04

No. of Grooves	Pitch Length	
	Inch	mm
140	28.0	711.2
142	28.4	721.36
143	28.6	726.44
145	29.0	736.6
146	29.2	741.68
148	29.6	751.84
150	30.0	762
153	30.6	777.24
155	31.0	787.4
157	31.4	797.56
158	31.6	802.64
160	32.0	812.8
161	32.2	817.88
165	33.0	838.2
169	33.8	858.52
170	34.0	863.6
172	34.4	873.76
174	34.8	883.92
175	35.0	889
176	35.2	894.08
178	35.6	904.24

Continued on the next page

Special Widths - cut to size from sleeves available from stock.



Pulleys are available with inch or metric standards.

XL Timing Belts - 1/5" or 5.08 mm Pitch

Stock Drive Products/Sterling Instrument Phone: 516-328-3300 Fax: 516-326-8827

■ NEOPRENE

■ 1/4, 5/16 & 3/8 INCH - 6, 8 & 9.5 mm WIDE

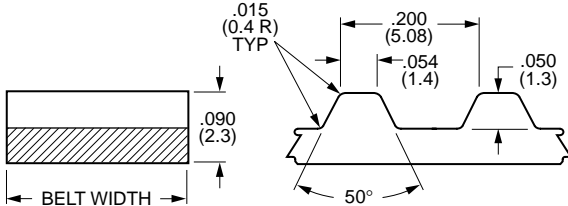

NOTE: Dimensions in () are mm size.

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example	
INCH	A 6 R 3 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	025 031 037	1/4 5/16 3/8	A 6 R 3-227031 is a 227 Groove 5/16" Wide Belt.	
	No. of Grooves (See tables below)				Width Code (See right)
METRIC	A 6 R 3 M <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	060 080 095	6 mm 8 mm 9.5 mm	A 6 R 3M368095 is a 368 Groove 9.5 mm Wide Belt.	
	No. of Grooves (See tables below)				Width Code (See right)

BREAKING STRENGTH: 113 lbs. per 1/8" (158 N per 1 mm) of Belt Width; not representative of the load-carrying capacity of the belt.

WORKING TENSION: 28 lbs. for 1" belt (125 N for 25.4 mm belt). For more on Working Tension, see the technical section.

MATERIAL: Nylon Covered, Fiberglass Reinforced, Neoprene

TEMPERATURE RANGE: -30°F to +185°F (-34°C to +85°C)

No. of Grooves	Pitch Length	
	Inch	mm
180	36.0	914.4
181	36.2	919.48
182	36.4	924.56
185	37.0	939.8
186	37.2	944.88
188	37.6	955.04
190	38.0	965.2
191	38.2	970.28
192	38.4	975.36
194	38.8	985.52
195	39.0	990.6
196	39.2	995.68
198	39.6	1005.84
200	40.0	1016
202	40.4	1026.16
204	40.8	1036.32
206	41.2	1046.48
207	41.4	1051.56
210	42.0	1066.8
212	42.4	1076.96
215	43.0	1092.2

No. of Grooves	Pitch Length	
	Inch	mm
216	43.2	1097.28
217	43.4	1102.36
219	43.8	1112.52
222	44.4	1127.76
225	45.0	1143
227	45.4	1153.16
228	45.6	1158.24
230	46.0	1168.4
234	46.8	1188.72
240	48.0	1219.2
243	48.6	1234.44
245	49.0	1244.6
246	49.2	1249.68
249	49.8	1264.92
250	50.0	1270
253	50.6	1285.24
*254	50.8	1290.32
257	51.4	1305.56
262	52.4	1330.96
270	54.0	1371.6
274	54.8	1391.92

No. of Grooves	Pitch Length	
	Inch	mm
277	55.4	1290.32
283	56.6	1437.64
285	57.0	1447.8
290	58.0	1473.2
296	59.2	1503.68
304	60.8	1544.32
306	61.2	1554.48
315	63.0	1600.2
331	66.2	1681.48
336	67.2	1706.88
345	69.0	1752.6
368	73.6	1869.44
380	76.0	1930.4
384	76.8	1950.72
385	77.0	1955.8
414	82.8	2103.12
425	85.0	2159
430	86.0	2184.4
444	88.8	2255.52
450	90.0	2286
510	102.0	2590.8
590	118.0	2997.2

* To be discontinued when present stock is depleted.

Special Widths - cut to size from sleeves available from stock.

Pulleys are available with inch or metric standards.